



LUMEN CENTER

Luminaire

Code BRICK RETTO 2 - 1 Wide beam
Name BRICK RETTO 2 - Ceiling lamp - CRI90 2700K - 1 Wide beam - 4x5,8W

Measurem.



Code 680-QL16-S01
Name BRICK RETTO 2 - Ceiling lamp - CRI90 2700K - 1 Wide beam - 4x5,8W

Luminaire Flux	996 lm	Luminaire Power	11.6 W	Efficacy	85.862 lm/W	Efficiency	100.00%
Source Flux	996 lm	Maximum value	433.07 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	

330mm x 175mm

C Halfplanes

180.0  0.0

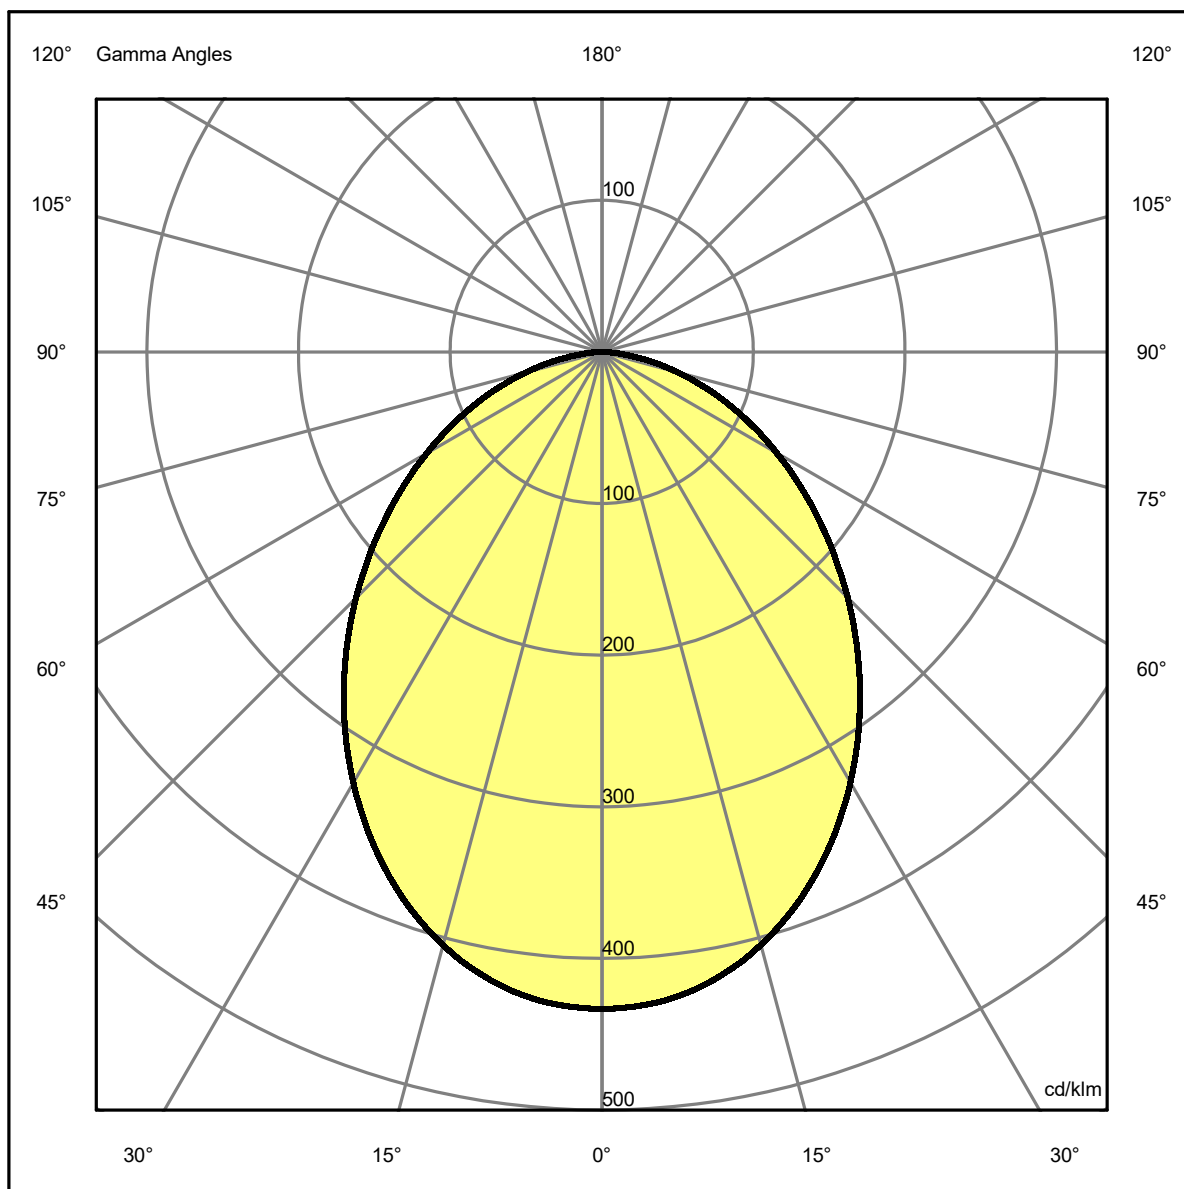



LUMEN CENTER

Luminaire

Code BRICK RETTO 2 - 1 Wide beam
Name BRICK RETTO 2 - Ceiling lamp - CRI90 2700K - 1 Wide beam - 4x5,8W

Measurem.


Code 680-QL16-S01
Name BRICK RETTO 2 - Ceiling lamp - CRI90 2700K - 1 Wide beam - 4x5,8W

Luminaire Flux	996 lm	Luminaire Power	11.6 W	Efficacy	85.862 lm/W	Efficiency	100.00%
Source Flux	996 lm	Maximum value	433.07 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.07	2.14	3.21	4.27	5.34	OC	1.07	2.14	3.21	4.27	5.34
OB	1.07	2.14	3.21	4.27	5.34	OD	1.07	2.14	3.21	4.27	5.34

Luminous Intensities [cd/klm]										
	0	5	15	25	35	45	55	65	75	85
OA	431.34	428.59	403.21	355.97	294.85	228.42	163.18	104.10	51.72	10.72
OB	431.34	428.59	403.21	355.97	294.85	228.42	163.18	104.10	51.72	10.72
OC	431.34	428.59	403.21	355.97	294.85	228.42	163.18	104.10	51.72	10.72
OD	431.34	428.59	403.21	355.97	294.85	228.42	163.18	104.10	51.72	10.72

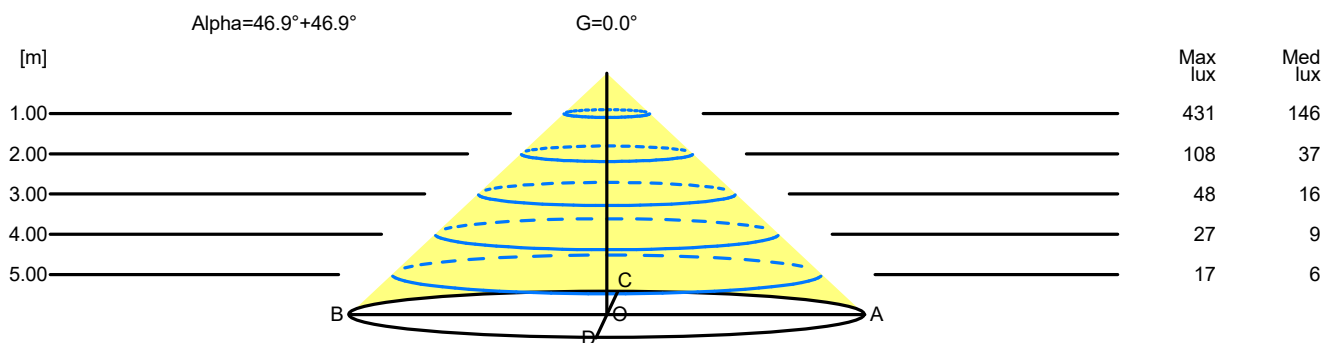

H[m]	D[m]	Max lux	Med lux	Alpha=46.9°+46.9°	G=0.0	
1.00	2.14	431	146			
2.00	4.27	108	37			
3.00	6.41	48	16			
4.00	8.55	27	9			
5.00	10.68	17	6			



LUMEN CENTER

Luminaire

Code BRICK RETTO 2 - 1 Wide beam
Name BRICK RETTO 2 - Ceiling lamp - CRI90 2700K - 1 Wide beam - 4x5,8W

Measurem.

Code 680-QL16-S01
Name BRICK RETTO 2 - Ceiling lamp - CRI90 2700K - 1 Wide beam - 4x5,8W

Luminaire Flux	996 lm	Luminaire Power	11.6 W	Efficacy	85.862 lm/W	Efficiency	100.00%
Source Flux	996 lm	Maximum value	433.07 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.70m

