



LUMEN CENTER

Luminaire

Code ASTOLFO ARM
Name ASTOLFO - Floor lamp - ARM CRI90 3000K 3240lm 36W


Measurem.

Code ASTOLFO ARM
Name ASTOLFO - Floor lamp - ARM CRI90 3000K 3240lm 36W


Luminaire Flux	2592 lm	Luminaire Power	36.0 W	Efficacy	71.994 lm/W	Efficiency	100.00%
Source Flux	2592 lm	Maximum value	319.50 cd/klm	Position	C=90.00 G=11.00	CG	Double Symmetrical

2020mm x 20mm

C Halfplanes



180.0 ————— 0.0
270.0 - - - - - 90.0

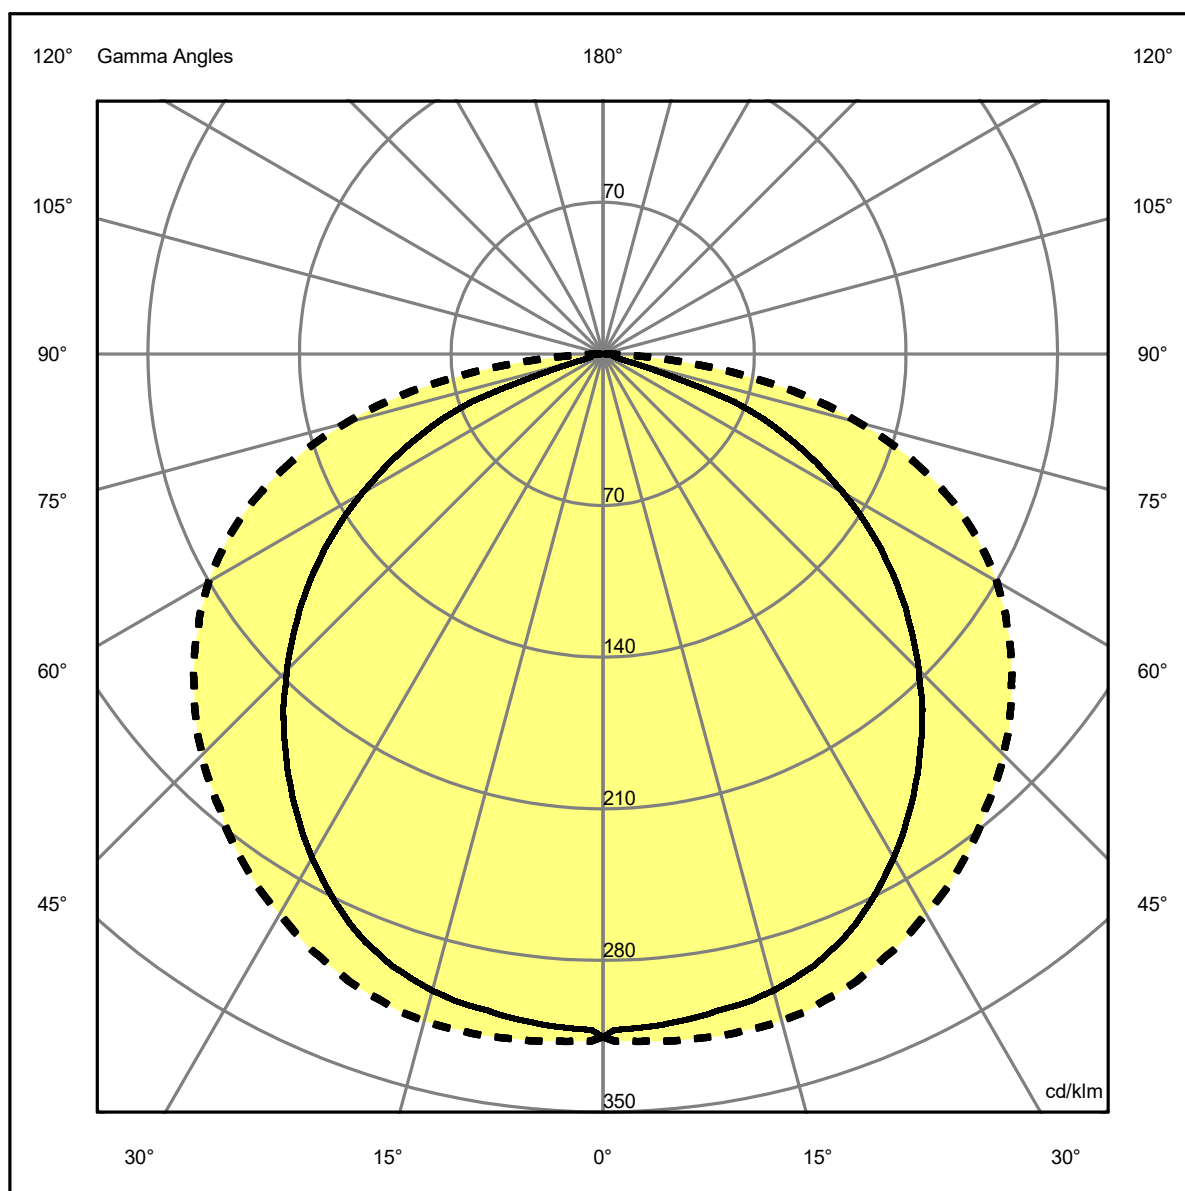



LUMEN CENTER

Luminaire

Code ASTOLFO ARM
Name ASTOLFO - Floor lamp - ARM CRI90 3000K 3240lm 36W

Measurem.


Code ASTOLFO ARM
Name ASTOLFO - Floor lamp - ARM CRI90 3000K 3240lm 36W

Luminaire Flux	2592 lm	Luminaire Power	36.0 W	Efficacy	71.994 lm/W	Efficiency	100.00%
Source Flux	2592 lm	Maximum value	319.50 cd/klm	Position	C=90.00 G=11.00	CG	Double Symmetrical

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.42	2.84	4.26	5.68	7.10	OC	2.76	5.51	8.27	11.03	13.78
OB	1.42	2.84	4.26	5.68	7.10	OD	2.76	5.51	8.27	11.03	13.78

Luminous Intensities [cd/klm]										
	0	5	15	25	35	45	55	65	75	85
OA	817.11	805.80	788.48	737.60	647.42	534.66	406.43	255.66	16.00	9.42
OB	817.11	805.80	788.48	737.60	647.42	534.66	406.43	255.66	16.00	9.42
OC	817.11	825.46	826.49	797.11	746.52	677.82	593.91	483.52	317.54	78.91
OD	817.11	825.46	826.49	797.11	746.52	677.82	593.91	483.52	317.54	78.91

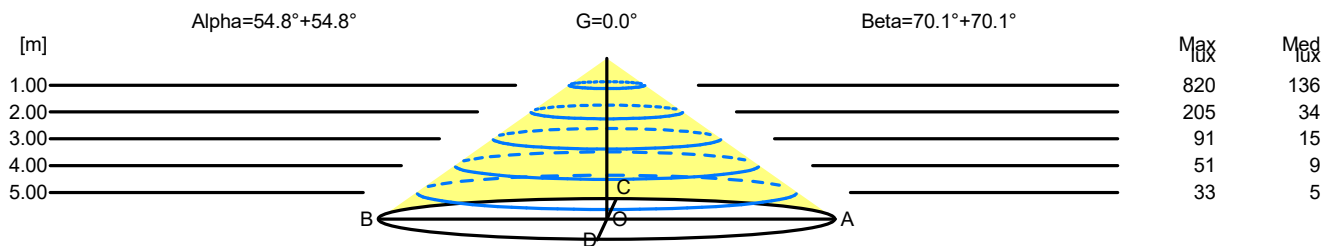

H[m]	D[m]	Max lux	Med lux	Alpha=54.8°+54.8°	G=0.0	
1.00	2.84	820	136			
2.00	5.68	205	34			
3.00	8.51	91	15			
4.00	11.35	51	9			
5.00	14.19	33	5			

H[m]	D[m]	Max lux	Med lux	Beta=70.1°+70.1°	G=0.0	
1.00	5.51	820	136			
2.00	11.03	205	34			
3.00	16.54	91	15			
4.00	22.05	51	9			
5.00	27.57	33	5			



LUMEN CENTER

Luminaire

Code ASTOLFO ARM
Name ASTOLFO - Floor lamp - ARM CRI90 3000K 3240lm 36W

Measurem.

Code ASTOLFO ARM
Name ASTOLFO - Floor lamp - ARM CRI90 3000K 3240lm 36W

Luminaire Flux	2592 lm	Luminaire Power	36.0 W	Efficacy	71.994 lm/W	Efficiency	100.00%
Source Flux	2592 lm	Maximum value	319.50 cd/klm	Position	C=90.00 G=11.00	CG	Double Symmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=1.33m

